

< INNVISION >

INNVISION SCL

/ Video controller and scaler

Professional LED display controller [video splicer / processor / sender] with high capability of video signal reception, processing and transmission.

For brilliant high-definition images and flexible video control.

/ InnVision SCL . Features

- > Video input ports: 1 × HDMI [loop function]
 1 × DVI [loop function]
 2 × SDI
 1 × DP
- > Input resolution max.: 1920 × 1200 @60Hz
- > Loading capacity: 2.3 million px [maximum width/height: 4096 px]

- > Scaling function
- > PIP function with placement and size adjustment
- > Strictly synchronized splicing and cascading among several controllers
- > 12 bit HD video source support
- > Brightness and chromaticity adjustment, color gamut transformation
- > Improved gray-scale at low brightness
- > Zero latency of sending
- > HDCP 1.4 support
- > Compatible with all receiving cards, multifunction card and optical fiber transceivers of InnVision



/ InnVision SCL . Specifications

Size: 1U standard box	Input Voltage: AC 100~240 V	Working temp.: -25 ~ 80 °C
--------------------------	-----------------------------	----------------------------

Weight: 2 kg	Rated Power: 20 W
--------------	-------------------

< INNVISION >


INNVISION SCL / *The Front Panel*

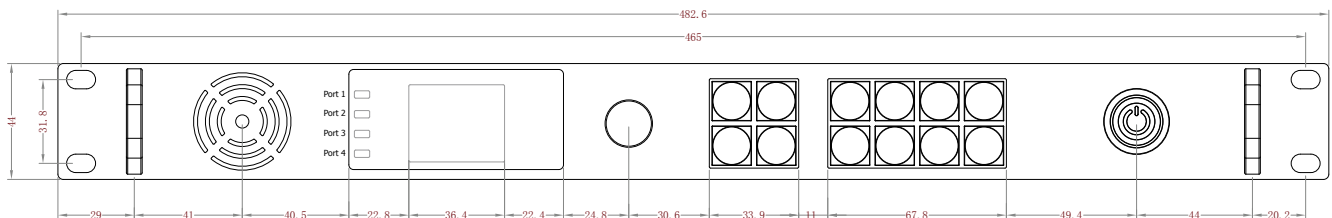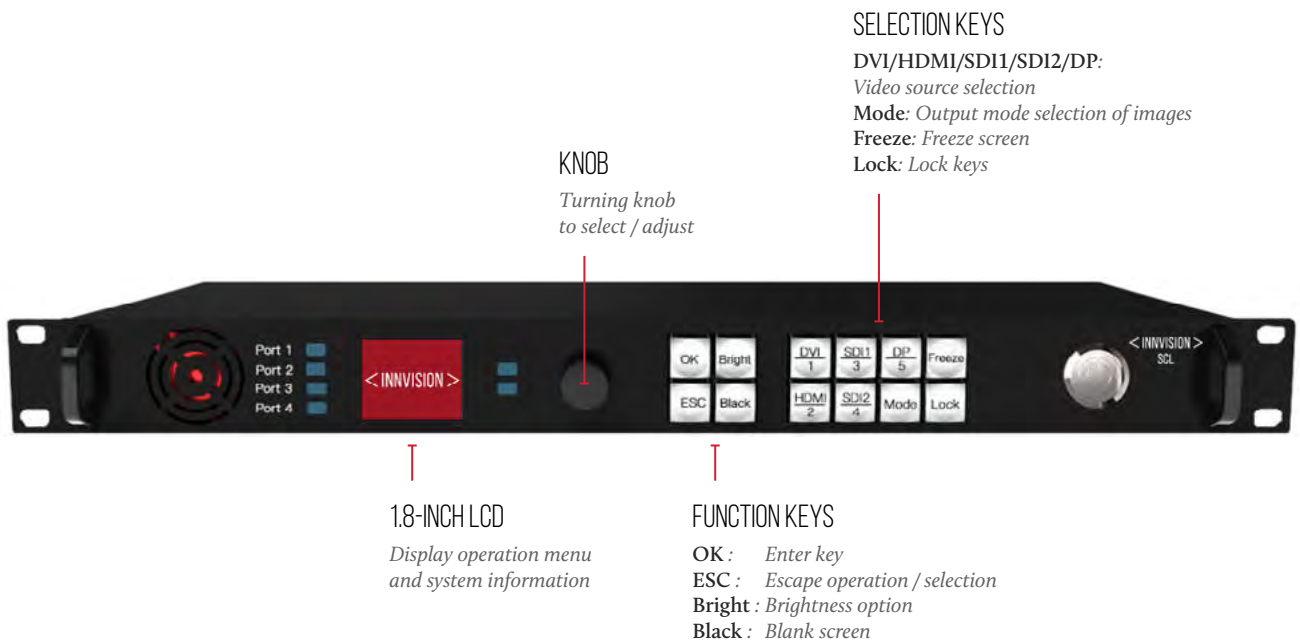

< INNVISION >

INNVISION SCL




/ *The Back Panel*

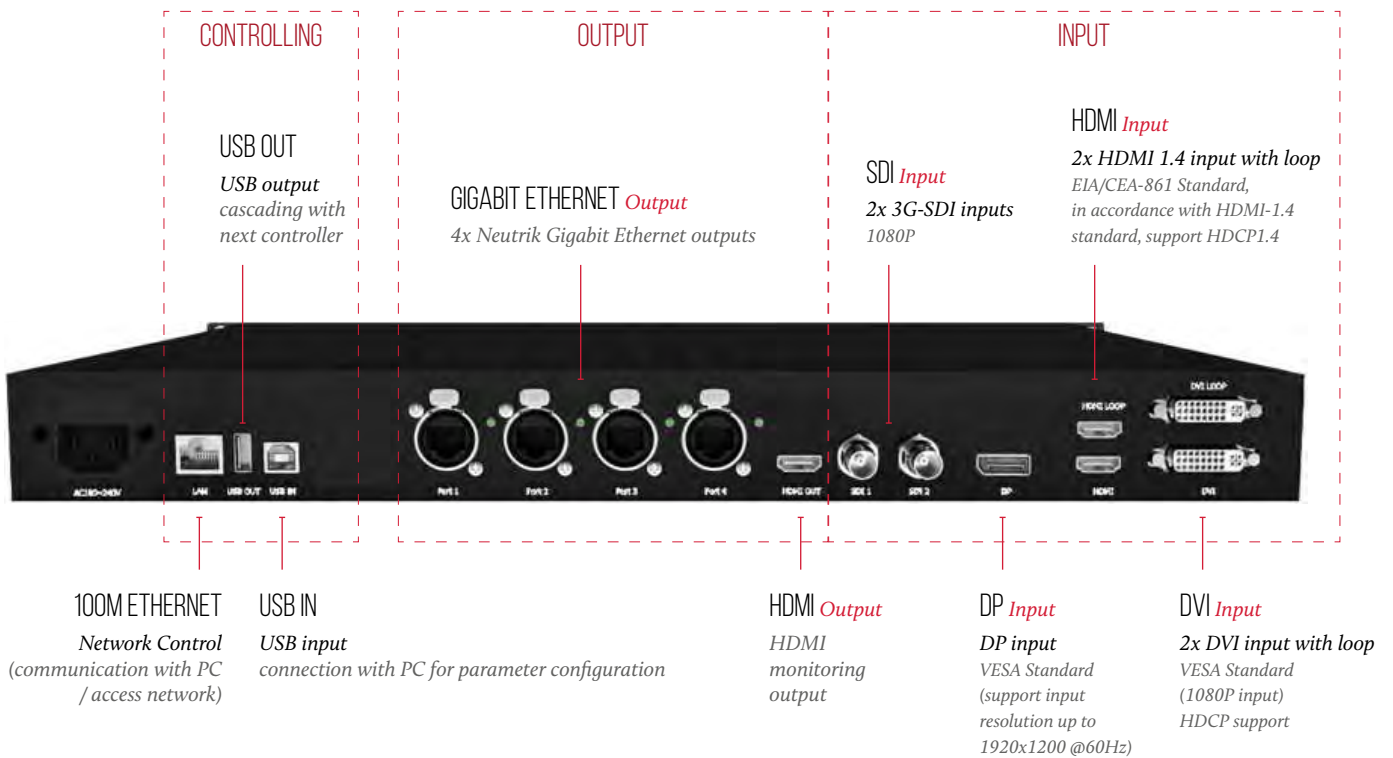

< INNVISION >

INNVISION SCL

/ *Technical drawing*

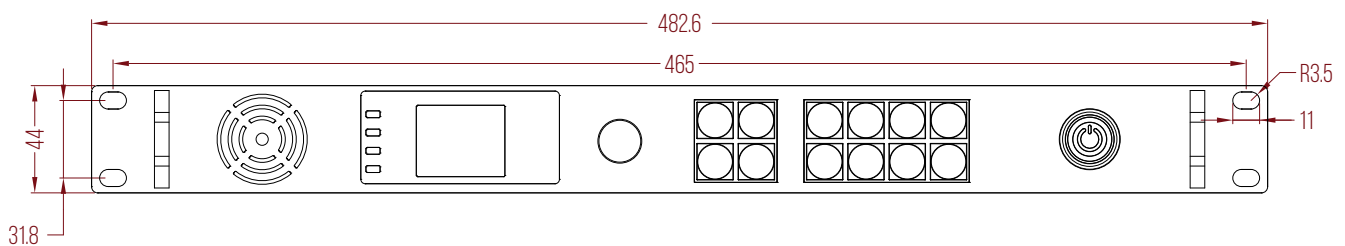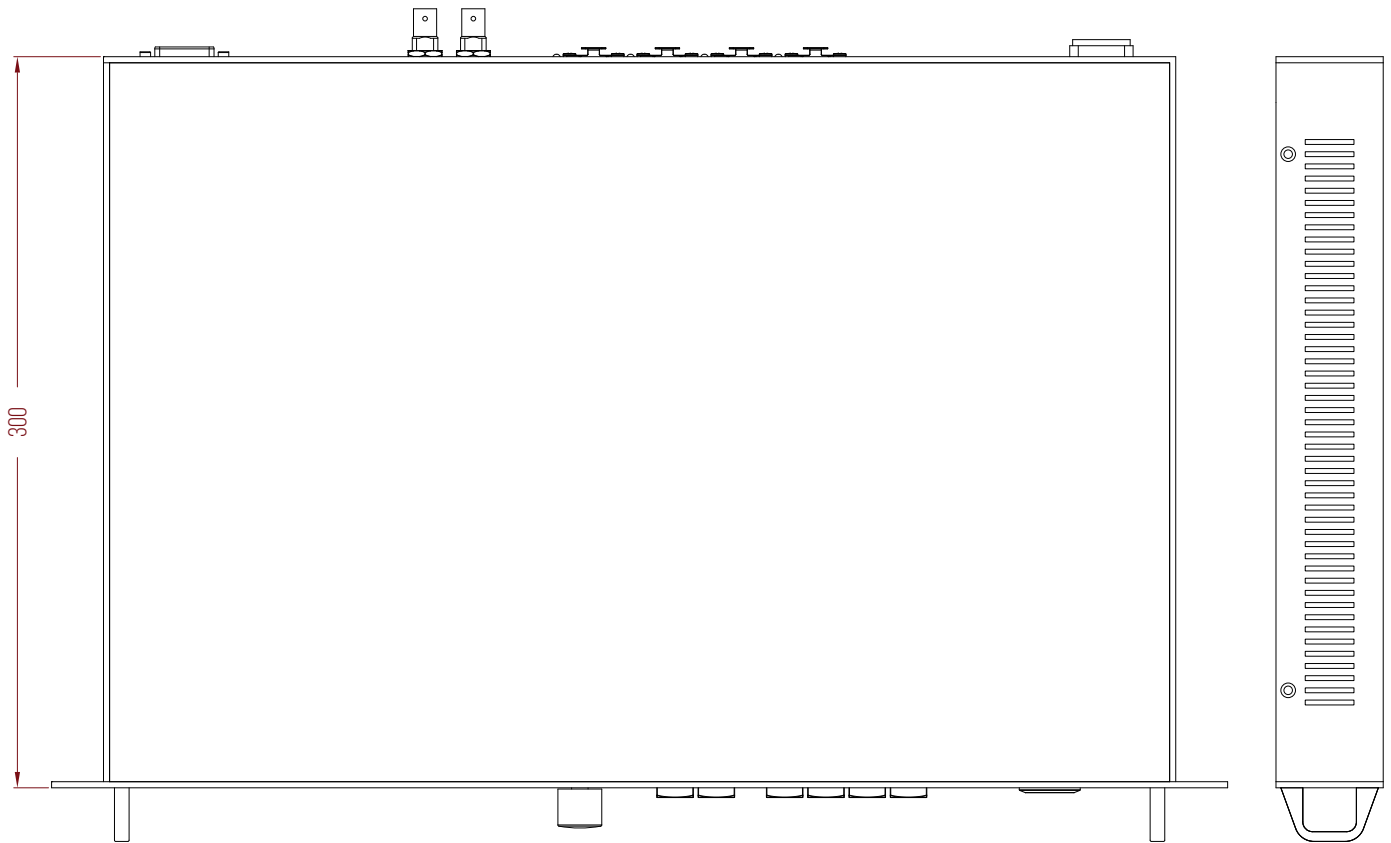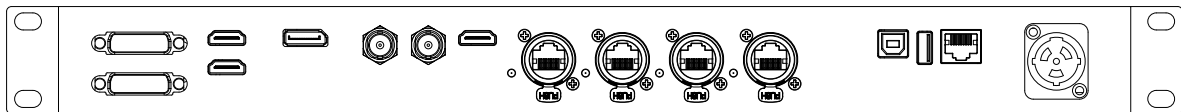

Innlights.

Business Unit of Trendcard GmbH.

Katernberger Straße 88 & 199

42115 Wuppertal

+49 (0) 202 9470 3030

info@innlights.de www.innlights.de