Agneovo

LA-2702 FULL HD DESKTOP MONITOR




FEATURES

- LED-backlit technology with 1920x1080 resolution
- Excellent clarity with the 20,000,000:1 dynamic contrast ratio and well colour performance
- · 3-sided bezel less design for seamless multi-display setups
- Wide Viewing Angle ensures the images being clear in every viewing angle
- Flicker-free backlight and blue light filter for eye comfort
- Versatile connectivity: DisplayPort, HDMI, VGA
- Built-in 1W speakers
- · VESA mounting for flexible installation
- · Cable management feature keeps workspaces neat and free of cable clutter

The LA-2702 is a 27-inch monitor featuring Full HD 1080p resolution, flicker-free technology and a blue-light filter that can meet eye comfort and daily use requirements. Featuring a 178/178 degrees wide viewing angle, a 20,000,000:1 dynamic contrast ratio and multiple connectivity options —DisplayPort, HDMI, and VGA — this desktop monitor with frameless design brings users visual enjoyment both at the workplace and in the home.

TECHNICAL DRAWING

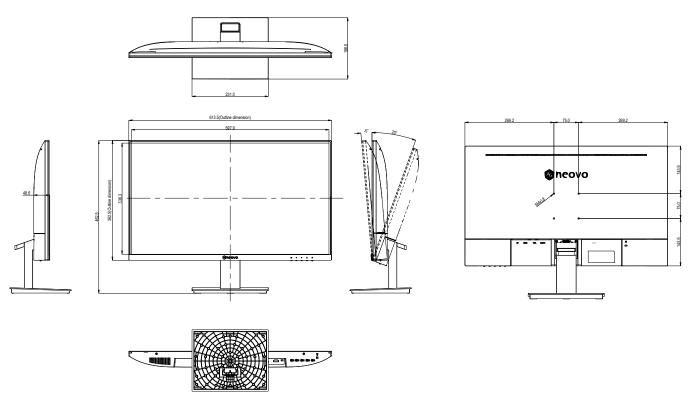



SPECIFICATIONS

Panel

| Fallel | |
|-------------------------------|------------------------------------------------------|
| Panel Type | LED-Backlit TFT LCD (IPS Technology) |
| Panel Size | 27.0" |
| Max. Resolution | FHD 1920 x 1080 |
| Pixel Pitch | 0.311 mm |
| Brightness | 250 cd/m ² |
| Contrast Ratio | 20,000,000 :1 (DCR) |
| Viewing Angle (H/V) | 178°/178° |
| Display Colour | 16.7M |
| Response Time | 5 ms |
| Frequency | |
| Frequency (H) | 30-82K Hz |
| Frequency (V) | 50-75 Hz |
| Signal Input | |
| DisplayPort | 1.2 x 1 |
| HDMI | 1.4 x 1 |
| VGA | 15-Pin D-Sub x 1 |
| Audio | |
| Audio In | Stereo Audio Jack (3.5 mm) |
| Internal Speakers | 1 W x 2 |
| Power | |
| Power Supply | Internal |
| Power Requirements | AC 100-240V, 50/60 Hz |
| On Mode | 17W (On) |
| Standby Mode | < 0.5W |
| Off Mode | < 0.3W |
| Operating Conditions | |
| Temperature | 0°C-40°C (32°F-104°F) |
| Humidity | 20%-85% (non-condensing) |
| Storage Conditions | |
| Temperature | -20°C-60°C (-4°F-140°F) |
| Humidity | 5%-95% (non-condensing) |
| Mounting | |
| VESA FPMPMI | Yes (75 x 75 mm) |
| Stand | |
| Tilt | -5° to 20° |
| Security | |
| Kensington Security Slot | Yes |
| Dimensions | |
| Product with Base (W x H x D) | 613.5 x 462.5 x 186.0 mm (24.2" x 18.2" x 7.3") |
| Product w/o Base (W x H x D) | 613.5 x 362.5 x 48.6 mm (24.2" x 14.3" x 1.9") |
| Packaging (W x H x D) | 687.0 x459.0 x 135.0 mm (27.1" x 18.1" x 5.3") |
| Weight | |
| Product with Base | 4.1 kg (9.0 lb) |
| Product w/o Base | 3.7 kg (8.2 lb) |
| Packaging | 5.5 kg (12.1 lb) |
| Regulation Approval | |
| Certifications & Compliance | CE, LVD, WEEE, RoHS, REACH, UKCA, FCC, ICES 003, EAC |
| Accessories | |
| Supplied | HDMI Cable, Power Cord, Quick Start Guide |
| Optional Accessories | |
| Wall Mount | PMK-01, WMA-01, WMK-01 |
| Desk Mount | DMC-01, ES-02 |
| | |











All specifications are subject to change without prior notice. Copyright $\textcircled{\sc opt}$ 2023 AG Neovo. All rights reserved. The name AG Neovo is a trademark of AIC. All other trademarks are the property of their respective owners. P/C: LA272A Version 2.0, 20230208

www.agneovo.com