


URMⅢ2.6 MK2 Pro


500mmx500mm Indoor

Die-cast Aluminum LED Display Unit

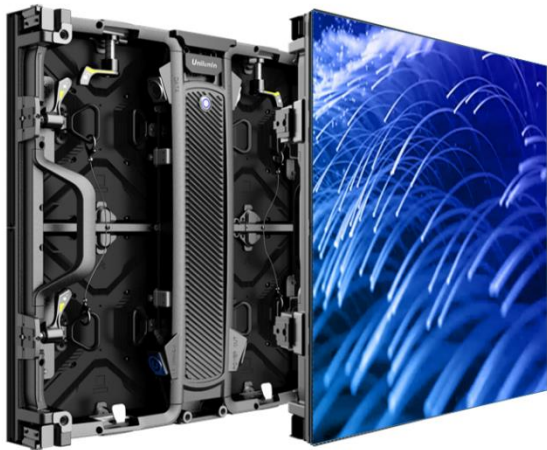

Product features:

1. Click-lock — true single-person installation.
2. Automatic shield — comprehensive corner protection.
3. Curve range — (Convex) -10° ~ $+10^{\circ}$
(Concave)

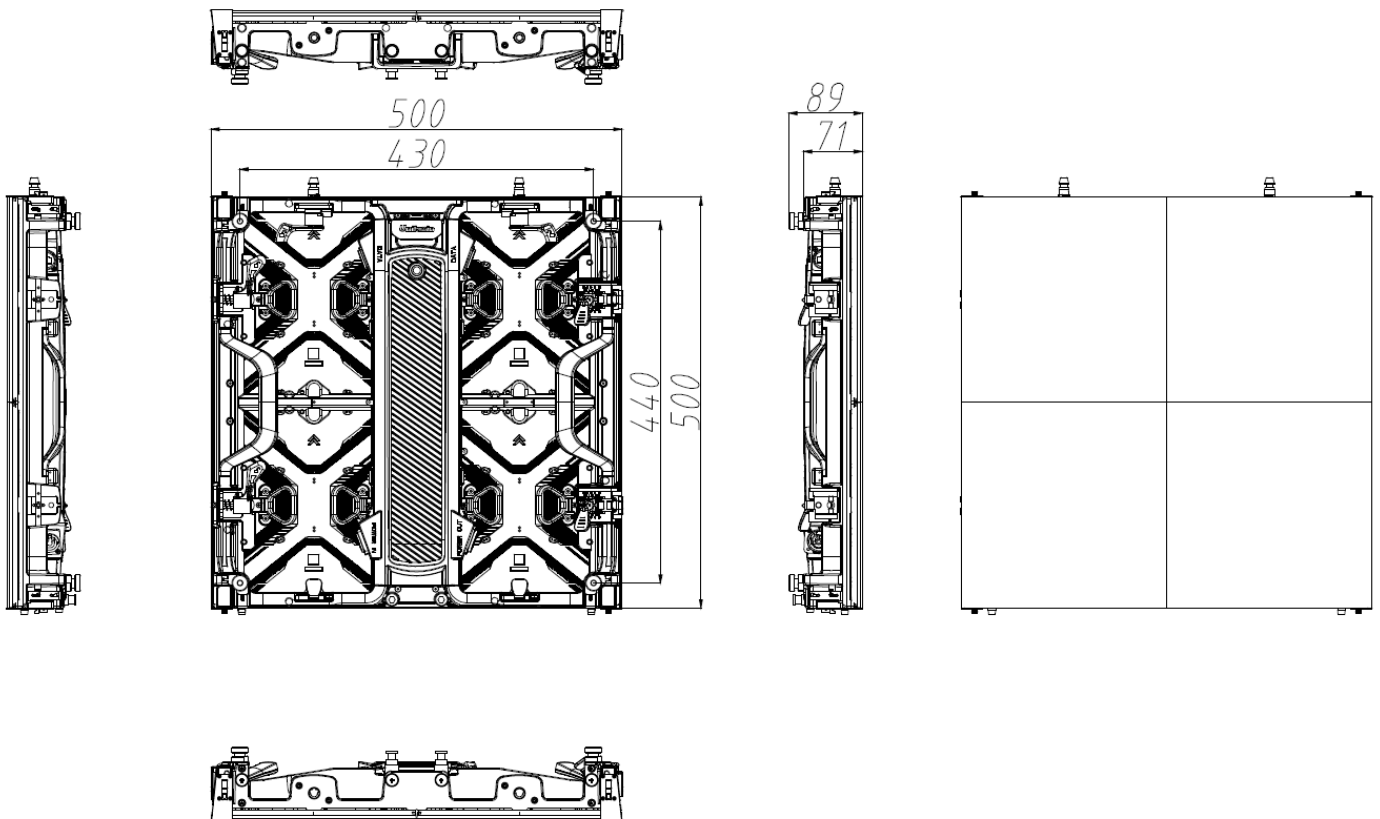

Main Technical Specifications:

Parameter	Value
Pixel Pitch	2.6mm
LED Type	3-in-1 Black SMD
Brightness	1100 cd/m ²
Pixel Density	147,456 pixels/m ²
Pixels Per Panel	192x192 pixels
Module Size	W250mmxH250mm
Panel Size (Without Corner screw)	W500mmxH500mmxD71mm
Panel Size(With Corner screw)	W500mmxH500mmxD89mm
Panel Weight	7.62 kg
Panel Weight with Flight Pins	7.8 kg
Maintenance	Rear & Front
Ingress Protection	IP30
Curve	(Convex) -10°~+10°(Concave)
Aspect Ratio	1:1
Panel Area	0.25 m ²
Recommended Viewing Distance	≥2.6m
Environment	Indoor
Material	Die-cast Aluminum
Calibration	Support Brightness and Chroma
Brightness Control	Manual/Automatic
Color Temperature	2,000K-9,300K Adjustable
Horizontal Viewing Angle	160°
Vertical Viewing Angle	160°
Contrast Ratio	5,000:1
Input Power <Max>	130 W/panel
Input Power <Typical>	45 W/panel
Input Voltage	100~240 VAC
Processing Depth	16 bit
Scan Method	1/16
Refresh Rate	3840@60 Hz
Video Frame Rate	50/60 Hz
Input Power Frequency	50~60 Hz
LED Life Time	100,000 Hours
Operating Temperature/Humidity	-10°C~+45°C/10~80%RH
Storage Temperature/Humidity	-20°C~+50°C/10~80%RH
Power Status	Diagnostic LEDs
Standard Mounting Configuration	Hanging, Stacking
Certification	TUV-CE/CB/FCC/IC/UL

- Note:
1. Specifications are for reference based on normal temperature conditions(25 °C).
 2. Power consumption tolerance: ±15%, according to the installation site environment.
 3. The deviation of cabinet weight is about ±5% due to different measurements.
 4. Specifications are for reference only and are subject to change without notice.