


# URMⅢ Series



## URMⅢ03

### Product features:

- Click-lock — true single-person installation.
- Automatic/Flip shield — comprehensive corner protection.
- Curve range — (Convex)  $-10^{\circ}$ ~ $+10^{\circ}$  (Concave)

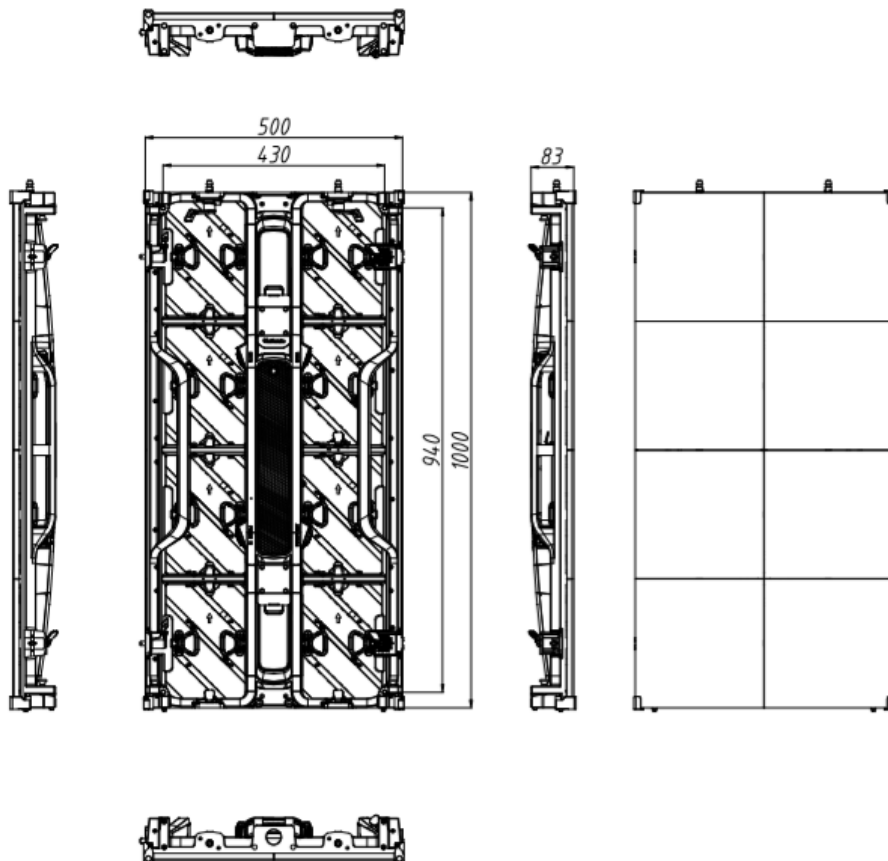

## Main Technical Specifications:

Parameter	URMIII03
Pixel Pitch	3.9mm
LED Type	3-in-1 Black SMD
Brightness	3,500~4,000 cd/m <sup>2</sup>
Pixel Density	65,536 pixels/m <sup>2</sup>
Pixels Per Panel	128×256 pixels
Module Size	W250mm×H250mm
Panel Size	W500mm×H1000mm×D83mm
Weight	14.6 kg/panel
Maintenance	Rear
Ingress Protection	IP65
Curve	(Convex) -10°~+10°(Concave)
Aspect Ratio	1:2
Panel Area	0.5 m <sup>2</sup>
Recommended Viewing Distance	≥3.9m
Environment	Outdoor
Material	Die-cast Aluminum
Calibration	Support Brightness and Chroma
Brightness Control	Manual/Automatic
Color Temperature	2,000K~9,300K Adjustable
Horizontal Viewing Angle	140°
Vertical Viewing Angle	120°
Contrast Ratio	4,500:1
Input Power <Max>	420 W/panel
Input Power <Typical>	150 W/panel
Input Voltage	100~240 VAC
Processing Depth	14 bit

Scan Method	1/16
Refresh Rate	3,840@60 Hz
Video Frame Rate	50/60 Hz
Input Power Frequency	50~60 Hz
LED Life Time	100,000 Hours
Operating Temperature/Humidity	-20°C~+50°C/10~90%RH
Storage Temperature/Humidity	-20°C~+55°C/10~60%RH
Standard Mounting Configuration	Hanging, Stacking
Certification	TUV-CE/CB/FCC/IC/UL

**Note:**

1. Specifications are for reference based on normal temperature conditions(25°C).
2. Power consumption tolerance:  $\pm 15\%$ , according to the installation site environment.
3. The deviation of cabinet weight is about  $\pm 5\%$  due to different measurements.
4. Specifications are for reference only and are subject to change without notice.