


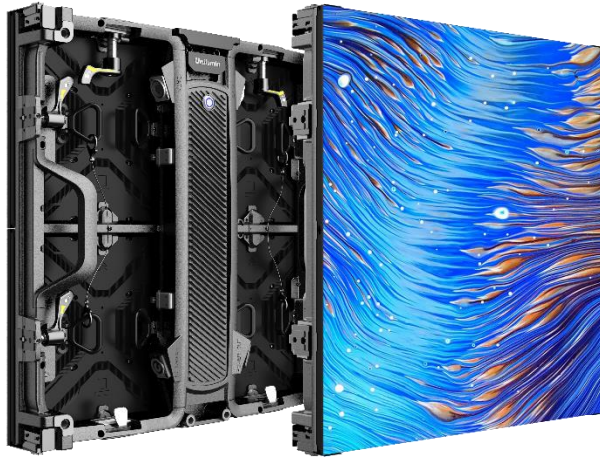


URM III Series

URM III 03P BF MK2

Product features:

- Click-lock — true single-person installation.
- Automatic — comprehensive corner protection.
- Curve range — (Convex) $-10^{\circ} \sim +10^{\circ}$ (Concave)
- Pinch n' go module — high efficiency of screen maintenance

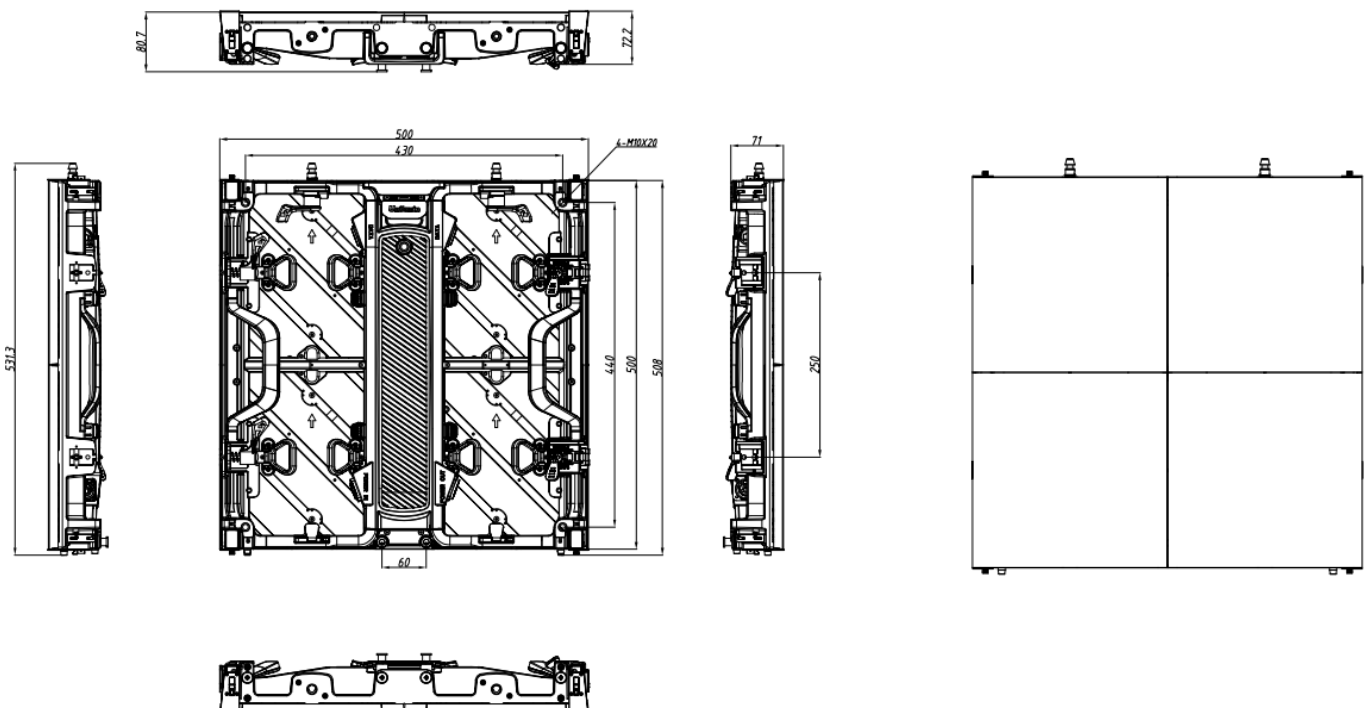

Main Technical Specifications:

Parameter	URM III 03P BF MK2
Pixel Pitch	3.9mm
LED Type	3-in-1 Black SMD
Receiving card	A10s Pro
Cable Type	Power jumper: Neutrik True one(H07RNF standards) Signal jumper: Neutrik(Halogen Free)
Brightness	3,700 cd/m ²
Pixel Density	65,536 pixels/m ²
Pixels Per Panel	128×128 pixels
Module Size	W250mm×H250mm
Panel Size(With stacking pins)	W500mm×H500mm×D80.7mm
Panel Size	W500mm×H500mm×D71mm
Weight	7.5 kg/panel
Maintenance	Rear
Ingress Protection	IP65
Curve	(Convex) -10°~+10°(Concave)
Aspect Ratio	1:1
Panel Area	0.25 m ²
Recommended Viewing Distance	≥3.9m
Environment	Outdoor
Material	Die-cast Aluminum
Calibration	Support Brightness and Chroma
Brightness Control	Manual/Automatic
Color Temperature	2,000K~9,300K Adjustable
Horizontal Viewing Angle	140°
Vertical Viewing Angle	120°
Contrast Ratio	6,000:1

Input Power <Max>	160 W/panel
Input Power <Typical>	53 W/panel
Input Voltage	100~240 VAC
Processing Depth	16 bit
Scan Method	1/16
Refresh Rate	7,680@60 Hz
Video Frame Rate	23~240 Hz
Input Power Frequency	50~60 Hz
LED Life Time	100,000 Hours
Operating Temperature/Humidity	-20℃~+50℃/10~90%RH
Storage Temperature/Humidity	-20℃~+55℃/10~60%RH
Standard Mounting Configuration	Hanging, Stacking
Certification	TUV-CE/CB/FCC/IC/UL

Note:

1. The image of the product above is for illustration only and may differ from the actual product (including but not limited to appearance, color, size, etc.).
2. The parameters are reference values, part of which is obtained under a specific test environment in Unilumin' s internal laboratory, there may be slight differences in actual use due to differences in product batch, configuration, software versions, use conditions, and environmental factors.