


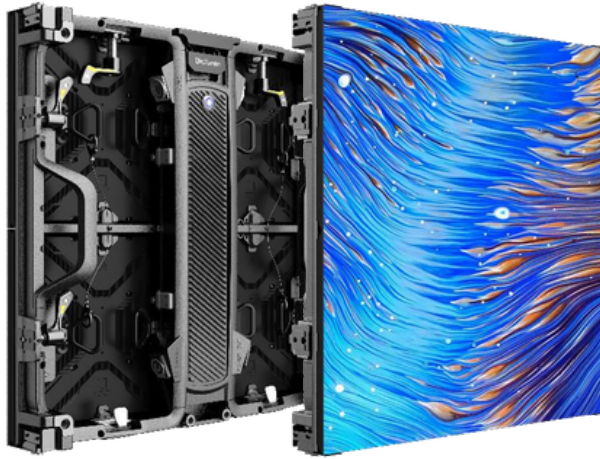


URM III Series

URM III 03 MK2 Pro

Product features:

- ☐ Click-lock — true single-person installation.
- ☐ Automatic — comprehensive corner protection.
- ☐ Curve range — (Convex) $-10^{\circ} \sim +10^{\circ}$ (Concave)
- ☐ Pinch n' go module — high efficiency of screen maintenance

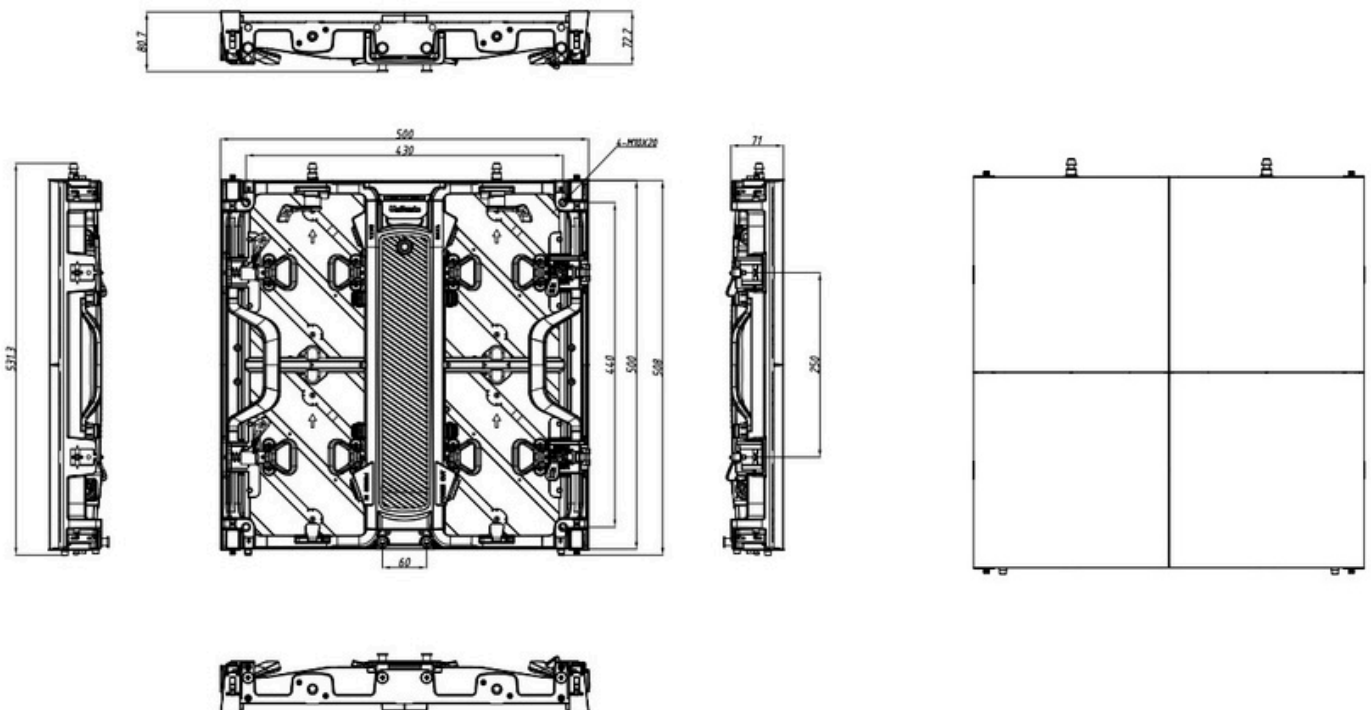

Main Technical Specifications:

Parameter	URM III 03 MK2 Pro
Pixel Pitch	3.9mm
LED Type	3-in-1 Black SMD
Receiving card	A10s Pro
Cable Type	Power jumper: Neutrik True one(H07RNF standards) Signal jumper: Neutrik(Halogen Free)
Brightness	3,700 cd/m ²
Pixel Density	65,536 pixels/m ²
Pixels Per Panel	128×128 pixels
Module Size	W250mm×H250mm W500mm×H500mm×D80.7mm
Panel Size(With stacking pins)	W500mm×H500mm×D71mm
Panel Size	7.5 kg/panel
Weight	Rear
Maintenance	IP65
Ingress Protection	(Convex) -10°~+10°(Concave)
Curve	1:1
Aspect Ratio	0.25 m ²
Panel Area	≥3.9m
Recommended Viewing Distance	Outdoor
Environment	Die-cast Aluminum
Material	Support Brightness and Chroma
Calibration	Manual/Automatic
Brightness Control	2,000K~9,300K Adjustable
Color Temperature	140°
Horizontal Viewing Angle Vertical	120°
Viewing Angle	6,000:1
Contrast Ratio	

Input Power <Max>	160 W/panel
Input Power <Typical>	53 W/panel
Input Voltage	100~240 VAC
Processing Depth	16 bit
Scan Method	1/16
Refresh Rate	7,680@60 Hz
Video Frame Rate	23~240 Hz
Input Power Frequency	50~60 Hz
LED Life Time	100,000 Hours
Operating Temperature/Humidity	-20°C~+50°C/10~90%RH
Storage Temperature/Humidity	-20°C~+55°C/10~60%RH
Standard Mounting Configuration	Hanging, Stacking
Certification	TUV-CE/CB/FCC/IC/UL

Note:

1. The image of the product above is for illustration only and may differ from the actual product (including but not limited to appearance, color, size, etc.).
2. The parameters are reference values, part of which is obtained under a specific test environment in Unilumin's internal laboratory, there may be slight differences in actual use due to differences in product batch, configuration, software versions, use conditions, and environmental factors.